


Straight Van Stone Thermowells are available in a variety of materials, flange sizes, and pressure ratings. They are available in various lengths and with optional lagging extensions. Thermowell specifications should be determined based on process conditions which include strength, temperature, pressure and corrosion resistance requirements. The Straight Van Stone thermowell is supplied with a 0.260" and 0.385" bore diameters to accommodate sensing elements with a 0.252" or 0.377 maximum diameters. Van Stone thermowells are connected using a separate and reusable backing flange eliminating the need for expensive flange materials. These wells are available as a separate component or as part of a complete sensor assembly.

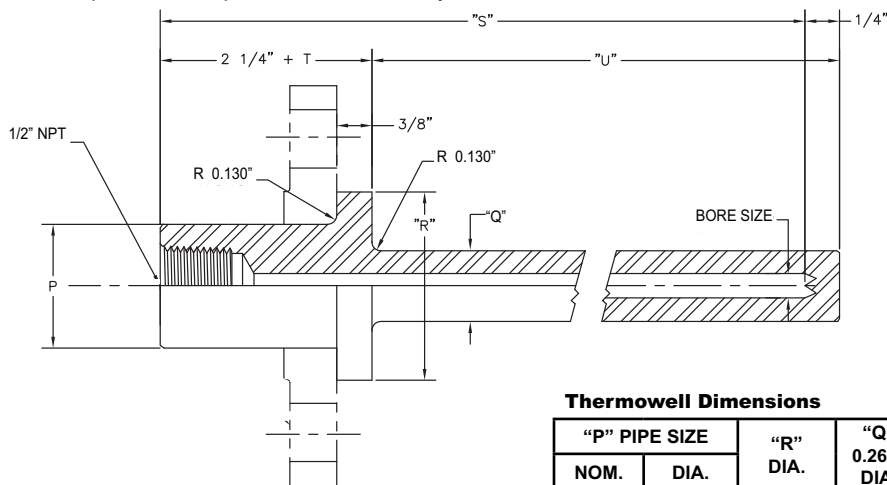

Thermowell Dimensions

"P" PIPE SIZE		"R" DIA.	"Q" 0.260" DIA.	"Q" 0.385" DIA.
NOM.	DIA.			
1"	1.315"	2"	3/4"	7/8"
1 1/2"	1.900"	2 7/8"	3/4"	7/8"

("U" length for non-lagging wells) = "S" - 2"
 ("U" length for lagging wells) = "S" - 2" - "T"
 (To solve for "T"), "T" = "S" - "U" - 2"
 (When "U" and "S" are specified)

ORDER CODES

Example Order Number:

1-0 1-1 1-2 1-3 1-4 1-5 1-6 1-7 1-8
SF 4 15 V 1 09 08 T2 C8S

1-0 Well Type

CODE	DESCRIPTION
SF	Straight Van Stone

1-1 Bore Size

CODE	DESCRIPTION
4	0.260" Dia. bore
6	0.385" Dia. bore

1-2 Flange Size

CODE	DESCRIPTION
10	1" (DN25)
15	1 1/2" (DN40)

1-3 Flange Type

CODE	DESCRIPTION
V	Van Stone (lap joint)

1-4 Pressure Rating

CODE	DESCRIPTION
0	No backing flange
1	150 Class
3	300 Class
6	600 Class
9	900 Class
15	1500 Class
Carbon steel lap joint flange standard	

1-8 Options

CODE	DESCRIPTION
C8	316 stainless steel well cap and chain
C22	Brass well cap and chain
S	Well stamped with customer specified part number

1-7 Optional "T" Lag Dimension

CODE	DESCRIPTION
	Leave blank if no lag is required
T__	Specify "T" dimension in inches

1-6 Material

CODE	DESCRIPTION
XX	Specify two digit material code as stated in the Thermowell Material Table located earlier in section

1-5 S Length

CODE	DESCRIPTION
XX	Specify length in inches using two digits plus fractional length