


Miniature thermocouple assemblies have very small swaged sheath diameters containing containing standard purity MgO (96%) insulated thermocouple elements. The small sheath size provides accurate and fast response time temperature measurement in a variety of laboratory, process, and special applications. These units are only offered with ungrounded junctions to prolong their useful life. Illustrated below are the most commonly used assemblies, however, other sensor configurations are available upon request.

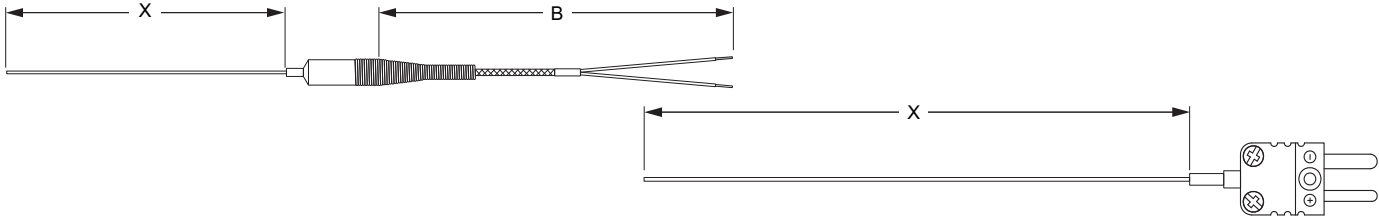

## ORDER CODES

**Example Order Number:** 1-1 1-2 1-3 1-4 - 2 - 3 - 4 - 5

**J** **040** **8** **U** - **012** - **00** - **16** - PAGE MGO-7 - PAGE MGO-7

### 1-1 Thermocouple Types

CODE
J
K

### 1-2 Sheath Diameter

CODE	DIAMETER (INCHES)
032	0.032
040	0.040

### 1-3 Sheath Material

CODE	MATERIAL
3	Inconel 600
8	316 Stainless steel

### 1-4 Measuring Junction

CODE	MATERIAL
U	Ungrounded junction
M	Special limits (consult factory)

### 2 'X' Dimension

Insert three digit sheath length ( X Dimension) in inches

### 3 Sheath Terminations

CODE	DESCRIPTION
4	Standard plug
5	Standard jack
6	Miniature plug
7	Miniature jack
<b>Options</b>	
MC	Mating Connector
<b>Leadwire Transitions</b>	
15	Extension leadwire transition fitting with relief spring 204 °C [400 °F]
16	Extension leadwire transition fitting with heat shrink 204 °C [400 °F]
19	Extension leadwire transition fgt. w/o relief spring or heat shrink 204 °C [400 °F]
<b>Options</b>	
HT <sup>(1)</sup>	High Temperature Potting 538 °C [1000 °F]