



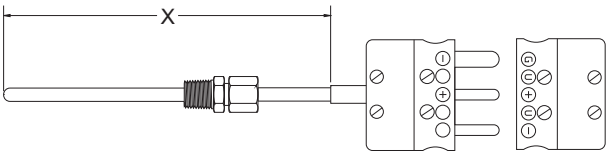



RT02 ORDER CODES RT01

Example Order Number:

R5T185L483-006-00 - 4, MC or R5T185L483-006-01A,304 - 16 - PAGE RTD-5 - PAGE RTD-6

(3-1: 4, MC — 3-2: 16)

3-1 Plug and Jack Sheath Terminations

CODE	DESCRIPTION
4[1]	Standard plug
5[1]	Standard jack
6[2]	Miniature plug
7[2]	Miniature jack
	Options
MC	Mating connector
CL	Compression L bracket to hold plug to sheath
[1] If used with 3/8” OD option CL must be specified [2] Not available with 1/4” OD or 3/8” OD sheath	

3-1 Sheath Terminations

CODE	DESCRIPTION
14[1]	Ceramic wafer block
22[2]	3” individual leads with terminal pins
[1] Duplex available in 2 wire only [2] High temp RTD’s are supplied with 1” long transition	

3-2 Leadwire transitions

(Requires Tbl. 4 and 5 selections)

CODE	DESCRIPTION
13[1]	Same size transition with heat shrink tubing 104 ºC [220 ºF]
15	Extension leadwire transition with relief spring 204 ºC [400 ºF]
16	Extension leadwire transition with heat shrink tubing 104 ºC [220 ºF]
18[1]	Same size transition without heat shrink tubing 204 ºC [400 ºF]
19	Extension leadwire transition without spring or heat shrink 204 ºC [400 ºF]
	Options
HT [2]	High temperature potting 538 ºC [1000 ºF] not available with option 13 or 16
[1] Not available with flex armor	
[2] Not available with option 13 or 16. When specifying high temp potting with Flex Armor option 19 must be selected.	

3-2 Threaded Fittings with Extension Leadwire

(Requires Tbl. 4 and 5 selections)

CODE	DESCRIPTION
6HN23	1/2” x 1/2” NPT steel hex nipple
8HN23	1/2” x 1/2” NPT stainless steel hex nipple
9HP23	1/2” NPT stainless steel bushing (no process threads)
8RNDC23	3/4” process x 1/2” NPT stainless steel hex nipple

© Copyright 2006 Pyromation, Inc., All Rights Reserved.