


HAZARDOUS LOCATION

Configuration Code XP02 Hazardous Location Explosion-Proof-Certified, Fixed-Element Thermocouple Assemblies

Explosion-Proof, Fixed-Element Thermocouples are made for use in U.S. and Canadian hazardous areas. They are designed to extinguish flames inside the device, eliminating the potential for ignition of flammable mixtures in the surrounding atmosphere. CSA certified assemblies, dependent on connection head type, meet XP Class I Division I & II; Groups A, B, C, D; DIP Class II Division I; Groups E, F, G; Class III; IP66. They may be installed directly in the process without being inserted into a thermowell. The assemblies feature 316 stainless steel sheaths in various diameter sizes and ungrounded isolated junctions. They are available with or without process mountings and with aluminum or stainless steel explosion-proof connection heads.

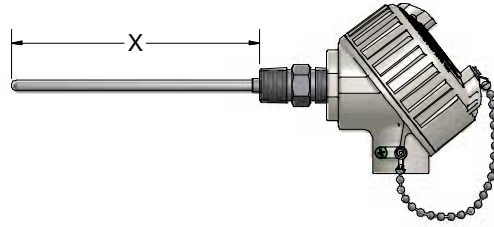

ORDER CODES

**Example
Order Number:**

1-0 2-0 2-1 2-2 2-3 3-0 4-0 5-0 5-1 5-2
HL09 - K 4 8 U - 012 - 00 - 8HN 93, T Select Type and Range from back of Section

1-0 Agency Approval

CODE	DESCRIPTION
HL09	CSA US/CAN explosion-proof-certified assembly

2-0 Thermocouple Types

CODE		
SINGLE	DUPLEX	TRIPLEX
E	EE	-
J	JJ	JJJ
K	KK	KKK
T	TT	-

2-1 Sheath Diameters

CODE	DIAMETER (inches)
2	1/8
3	3/16
4	1/4
6	3/8

2-2 Sheath Materials

CODE	MATERIAL	STANDARD AVAILABLE TYPES
3	Alloy 600	K
4	310 SS	K
5	446 SS	K
8	316 SS	E, J, K, T

2-3 Measuring Junction

CODE	DESCRIPTION
U	Ungrounded

5-1 Head Terminations

CODE	DESCRIPTION
74	DIN form B aluminum explosion-proof head
75T142C	(4 to 20) mA HART® Field Transmitter with aluminum explosion-proof housing
76T71-D10	(4 to 20) mA isolated programmable transmitter with digital display and explosion-proof aluminum housing
76T72-D10	(4 to 20) mA isolated programmable HART® transmitter with digital display and explosion-proof aluminum housing
76T82-D10	(4 to 20) mA dual input HART® Field Transmitter with digital display and explosion-proof aluminum housing
93	Aluminum explosion-proof head
94	316L stainless steel explosion-proof head

5-2 Options

SB	1/2" NPT conduit reducer bushing
I	Stainless steel tag
T71-00	(4 to 20) mA isolated head-mounted transmitter
T72-00	(4 to 20) mA HART® isolated head-mounted transmitter
T82-00	(4 to 20) mA dual input, isolated HART® head-mounted transmitter

See transmitter ordering information in back of section.

5-0 Head Mounting Fittings

CODE	DESCRIPTION
8HN	1/2" x 1/2" NPT stainless steel hex nipple
9HP	1/2" NPT stainless steel bushing (no process threads)
8RNDC	3/4" x 1/2" NPT stainless steel hex nipple

4-0 Sheath Mounting Fittings

CODE	DESCRIPTION
00	No Fitting

3-0 "X" Dimensions

Insert three digit sheath length ("X" Dimension) in inches.


HART® is a registered trademark of the HART Communication Foundation.



HAZARDOUS LOCATION

Configuration Code XP02 Hazardous Location Flame-Proof-Certified, Fixed-Element Thermocouple Assemblies

Flame-Proof, Fixed-Element Thermocouples are made for use in IEC hazardous areas. They are designed to extinguish flames inside the device, eliminating the potential for ignition of flammable mixtures in the surrounding atmosphere. ATEX and IECEx certified assemblies are rated for Ex db IIC Gb and Ex tb IIIC Db locations for applications with process temperatures of 180 °C or less. They may be installed directly in the process without being inserted into a thermowell. The assemblies are available in various sheath material, diameters sizes and ungrounded isolated junctions. They are available with or without process mountings and with aluminum or stainless steel explosion-proof connection heads.

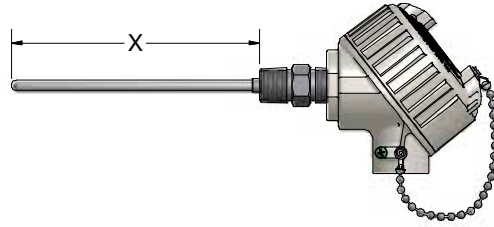

ORDER CODES

**Example
Order Number:**

HL06 - **K 4 8 U** - **012** - **00** - **8HN 93, T** Select Type and Range from back of Section

1-0 Agency Approval

CODE	DESCRIPTION
HL06	ATEX/IECEx flame-proof-certified assembly

2-0 Thermocouple Types

CODE		
SINGLE	DUPLEX	TRIPLEX
E	EE	-
J	JJ	JJJ
K	KK	KKK
T	TT	-

2-1 Sheath Diameters

CODE	DIAMETER (inches)
2	1/8
3	3/16
4	1/4
6	3/8

2-2 Sheath Materials

CODE	MATERIAL	STANDARD AVAILABLE TYPES
3	Alloy 600	K
4	310 SS	K
5	446 SS	K
8	316 SS	E, J, K, T

2-3 Measuring Junction

CODE	DESCRIPTION
U	Ungrounded

5-1 Head Terminations

CODE	DESCRIPTION
75T142E	(4 to 20) mA HART® Field Transmitter with aluminum flame-proof housing
76T71-D10	(4 to 20) mA isolated programmable transmitter with digital display and explosion-proof aluminum housing
76T72-D10	(4 to 20) mA isolated programmable HART® transmitter with digital display and explosion-proof aluminum housing
76T82-D10	(4 to 20) mA dual input HART® Field Transmitter with digital display and explosion-proof aluminum housing
93	Aluminum flame-proof head
94	316L stainless steel flame-proof head

5-2 Options

SB	1/2" NPT conduit reducer bushing, Aluminum
I	Stainless steel tag
M2	M20x1.5 conduit reducer bushing, Nickel Plated Brass
M5	M25x1.5 conduit reducer bushing, Nickel Plated Brass
T71-00	(4 to 20) mA isolated head-mounted transmitter
T72-00	(4 to 20) mA HART® isolated head-mounted transmitter
T82-00	(4 to 20) mA dual input, isolated HART® head-mounted transmitter

See transmitter ordering information in back of section.

5-0 Head Mounting Fittings

CODE	DESCRIPTION
6HN	1/2" x 1/2" NPT steel hex nipple 1" "E" length
8HN	1/2" x 1/2" NPT stainless steel hex nipple 1" "E" length
9HP	1/2" NPT stainless steel bushing (no process threads)
8RNDC	3/4" x 1/2" NPT stainless steel hex nipple

4-0 Sheath Mounting Fittings

CODE	DESCRIPTION
00	No Fitting

3-0 "X" Dimensions

Insert three digit sheath length ("X" Dimension) in inches.

HART® is a registered trademark of the HART Communication Foundation.



ORDER CODES

Example Order Number: 1-0 **75T142C** - 1-1 **D** - 1-2 **3** 1-3 **85** 1-4 **U** - 1-5 **S(0-200)** 1-6 **C** - 1-7 **B**

1-0 Transmitter Type

CODE	DESCRIPTION
T31	(4 to 20) mA programmable head-mounted RTD transmitter
T71-00	(4 to 20) mA programmable head-mounted universal transmitter
T72-00	(4 to 20) mA HART® programmable head-mounted universal transmitter
75T142C	(4 to 20) mA HART® Field Transmitter with explosion-proof aluminum housing FM/CSA /XP Class I Div I Groups A,B,C,D; DIP Class II Div 1 Groups E,F,G; Class III; NI Class I Div II Groups A,B,C,D
75T142E	(4 to 20) mA HART® Field Transmitter with flame-proof/dust-protected aluminum housing ATEX/IECEX; Ex d IIC T6...T4Gb; Ex tb IIIC T110 °C Db, IP66/67
76T71-D10	(4 to 20) mA isolated Programmable transmitter with digital display and explosion-proof aluminum housing
76T72-D10	(4 to 20) mA isolated Programmable HART® transmitter with digital display and explosion-proof aluminum housing

1-1 Options (For 142 Series only)

CODE	DESCRIPTION
T	Solid cover
D	Glass cover with digital display
Leave blank if using T31, T71 or T72	

1-2 Input Type

CODE	DESCRIPTION
00 ^[1]	Unconfigured
1	Thermocouple (TC)
2	RTD (2-wire)
3	RTD (3-wire)
4	RTD (4-wire)
[1] Default setting supplied as 4-wire Pt100 (0-100) °C	

1-7 Options

CODE	DESCRIPTION
B ^[1]	Bluetooth (APP) Configuration
[1] Only available with T72 Models	

1-6 Unit of Measure

CODE	DESCRIPTION
C	Celsius
F	Fahrenheit

1-5 Range

CODE	DESCRIPTION
S	(lower limit – upper limit)

1-4 Failure Mode

CODE	DESCRIPTION
U	Upscale burnout ≥ 20.5 mA
D	Downscale burnout ≤ 3.8 mA

1-3 Sensor Type

CODE	DESCRIPTION
J	Type J thermocouple
K	Type K thermocouple
T	Type T thermocouple
N	Type N thermocouple
E	Type E thermocouple
85	100 ohm platinum ($\alpha = 0.00385 \text{ } ^\circ\text{C}$)

For complete transmitter specifications see Transmitter Section.

HART® is a registered trademark of the HART Communication Foundation.



ORDER CODES

Example Order Number:

1-0 1-1 1-2 1-3 1-4 1-5 1-6 1-7 1-8
76T82-D10 - 33 - 85 - 85 - A - U - S(0-200) C - SIL

1-0 Transmitter Type

CODE	DESCRIPTION
T82-00	(4 to 20) mA dual input, isolated HART® head-mounted Transmitter, no display (transmitter only)
76T82-D10	(4 to 20) mA dual input HART® programmable Transmitter with digital display and explosion-proof aluminum housing, FM/CSA,NI,IS,XP,DIP Class I Div I and Div II, Groups A,B,C,D

1-1 Configuration Input

CODE	DESCRIPTION
00	T82 Unconfigured
2I	Ch1: RTD 2-wire, Ch2: inactive
22	Ch1: RTD 2-wire, Ch2: RTD 2-wire
23	Ch1: RTD 2-wire, Ch2: RTD 3-wire
2T	Ch1: RTD 2-wire, Ch2: Thermocouple
3I	Ch1: RTD 3-wire, Ch2: inactive
32	Ch1: RTD 3-wire, Ch2: RTD 2-wire
33	Ch1: RTD 3-wire, Ch2: RTD 3-wire
3T	Ch1: RTD 3-wire, Ch2: Thermocouple
4I	Ch1: RTD 4-wire, Ch2: inactive
4T	Ch1: RTD 4-wire, Ch2: Thermocouple
TI	Ch1: Thermocouple, Ch2: inactive
TT	Ch1: Thermocouple, Ch2: Thermocouple

1-2 Sensor Input Channel 1

CODE	DESCRIPTION
J	Type J thermocouple
K	Type K thermocouple
T	Type T thermocouple
N	Type N thermocouple
E	Type E thermocouple
85	100 ohm platinum ($\alpha = 0.00385 \text{ } ^\circ\text{C}^{-1}$)

1-8 SIL Option

CODE	DESCRIPTION
SIL	Safety Integrity Level SIL2 and Supports SIL3

1-7 Unit of Measure

CODE	DESCRIPTION
C	Celsius
F	Fahrenheit

1-6 Range

CODE	DESCRIPTION
S	(lower limit – upper limit)

1-5 Failure Mode

CODE	DESCRIPTION
U	Upscale Burnout $\geq 20.5 \text{ mA}$
D	Downscale Burnout $\leq 3.8 \text{ mA}$

1-4 Input Set-ups

CODE	DESCRIPTION
A	Process Variable = Ch1; CH2 = inactive
B	Process variable = CH1; secondary variable = Ch2
C	Process variable = the difference between CH1 and Ch2
D	Process variable = the average between CH1 and Ch2
E	Sensor backup; Process variable= Ch1 and Ch2

1-3 Sensor Input Channel 2

CODE	DESCRIPTION
J	Type J thermocouple
K	Type K thermocouple
T	Type T thermocouple
N	Type N thermocouple
E	Type E thermocouple
85	100 ohm platinum ($\alpha = 0.00385 \text{ } ^\circ\text{C}^{-1}$)
00	No second channel

For complete transmitter specifications see Transmitter Section.

HART® is a registered trademark of HART Communication Foundation.

