


Heat-tracing Thermocouples are made for use in systems that measure the surface temperature of process pipe that is carrying products whose temperatures must be controlled to prevent freeze-up, or to maintain a viscosity level so that the inner medium will flow. These sensors are constructed with Thermocouple sensing elements inside 316SS sheaths, and with a 3/4" Radius stainless steel mounting pad. Cold legs are available in customer-specified lengths to accommodate pipe insulation thickness.

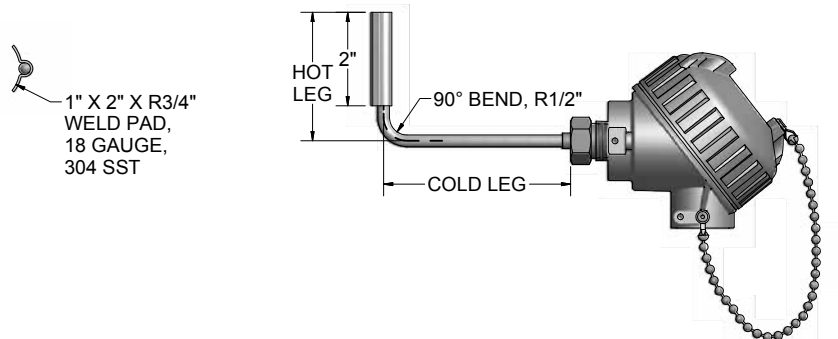

ORDER CODES

Example Order Number:

1-0 1-1 1-2 2-0 3-0 4-0 4-1
J P48 U - HT - 0304 - 18RD - 31, I

1-0 Thermocouple Types

CODE	
<i>SINGLE</i>	<i>DUPLEX</i>
E	EE
J	JJ
K	KK
T	TT

1-1 316 SS Sheath Diameters and Insulation Types

CODE	DIAMETERS (inches)	INSULATION TYPE
48	1/4	MgO
68	3/8	MgO
P48	1/4	Fiberglass
P68	3/8	Fiberglass

1-2 Measuring Junction

CODE	DESCRIPTION
G	Grounded junction
U	Ungrounded junction
ELEMENT OPTIONS	
M	Special Limits of Error

2-0 Sheath Lengths

CODE	HOT LEG (inches)	COLD LEG (inches)
0304	3	4
0306	3	6
0308	3	8

Consult factory for other hot leg lengths or cold leg lengths.

3-0 Radius Mounting Pads 1" W x 2" L x 18 Ga. 304 SS

CODE	RADIUS (inches)	NPT PIPE SIZE (inches)
18RD	3/4	1 1/2

Mounting pad is flexible enough to be formed around pipe sizes from 1" to 12" NPS pipe.

4-0 Standard Head Terminations

CODE	DESCRIPTION
31	Aluminum screw-cover head
34	Cast iron screw-cover head
35T142A	(4 to 20) mA HART® Field Transmitter with aluminum general-purpose housing
36T71-D10	(4 to 20) mA isolated Programmable transmitter with digital display and general purpose aluminum housing with glass lid
36T72-D10	(4 to 20) mA isolated Programmable HART® transmitter with digital display and general purpose aluminum housing with glass lid
36T82-D10	(4 to 20) mA dual input HART® transmitter with digital display and general-purpose aluminum housing with glass lid
49	Flip-top aluminum head
63	White polypropylene screw-cover head
91	316 L Stainless steel screw-cover head
93	Aluminum explosion-proof/flame-proof head, NEC, IEC, Atex approved
94	316L stainless steel explosion-proof/flame-proof head, NEC, IEC, Atex approved

4-1 Standard Head Options

CODE	DESCRIPTION
CG	Nylon cord grip
GS	Ground screw
I	Stainless steel tag
NB	1/2" NPT nylon conduit reducer bushing
SB	1/2" NPT conduit reducer bushing
T71-00	(4 to 20) mA isolated programmable transmitter
T72-00	(4 to 20) mA isolated programmable HART® head-mounted transmitter
T82-00	(4 to 20) mA dual input HART® head-mounted transmitter

HART® is a registered trademark of HART Communication Foundation.