


HAZARDOUS LOCATION

Configuration Code XP03
Hazardous Location Flame-Proof-Certified,
RTD Assemblies with Thermowells

Flame-Proof RTD Assemblies with Thermowells are made for use in IEC hazardous areas. They are designed to extinguish flames inside the device, eliminating the potential for ignition of flammable mixtures in the surrounding atmosphere. ATEX and IECEx certified assemblies are rated for Ex db IIC Gb and Ex tb IIIC Db locations for applications with process temperatures of 180 °C or less. The required thermowell is available in standard, heavy-duty, and flanged constructions. The assemblies feature 316 stainless steel sheaths. They are available with aluminum or stainless steel explosion-proof connection heads.

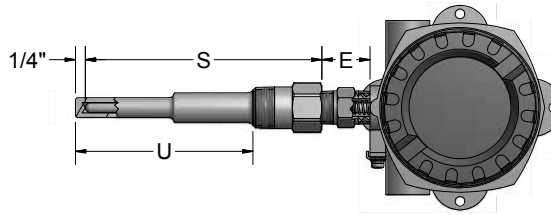

ORDER CODES

Example

Order Number:

HL06 - **R1T185L** **48** **3** - Select Thermowell Part # from Thermowell Section - **FP** - **8HN** **75T-642E**, **I** Select Type and Range from back of Section

1-0 Agency Approval

CODE	DESCRIPTION
HL06	ATEX/IECEx flame-proof-certified assembly

2-0 100 Ω Platinum RTD Elements α = 0.003 85 °C⁻¹

CODE		TOLERANCE ^[1]	TEMP. RANGE
SINGLE	DUPLEX		
R1T185L	R1T285L	Grade B	(-200 to 200) °C
R5T185L	R5T285L	(1/5) Class B	(-30 to 150) °C
RBF185L	RBF285L	Class B	(-50 to 200) °C
RAF185L	RAF285L	Class A	(-30 to 200) °C
R1T185H	R1T285H	Grade B	(-200 to 600) °C
RAT185H	RAT285H	Class A	(-100 to 450) °C

[1] Refer to RTD tolerance information in the General Information section for calculations to determine specific tolerance at temperature.

2-1 Sheath Diameters 316 SS

CODE	DIAMETERS (inches)
48	1/4

2-2 Element Connection

CODE	DESCRIPTION
2	2-wire
3	3-wire
4	4-wire

3-0 Thermowell

Select thermowell part number from Thermowell Section.

5-1 Head Terminations

CODE	DESCRIPTION
75T142E	(4 to 20) mA HART® Field Transmitter with aluminum flame-proof housing
76T71-D10	(4 to 20) mA isolated programmable transmitter with digital display and explosion-proof aluminum housing
76T72-D10	(4 to 20) mA isolated programmable HART® transmitter with digital display and explosion-proof aluminum housing
76T82-D10	(4 to 20) mA dual input HART® Field Transmitter with digital display and explosion-proof aluminum housing
93	Aluminum flame-proof head
94	316L stainless steel flame-proof head

5-2 Options

SB	1/2" NPT conduit reducer bushing, Aluminum
I	Stainless steel tag
M2	M20x1.5 conduit reducer bushing, Nickel Plated Brass
M5	M25x1.5 conduit reducer bushing, Nickel Plated Brass
T71-00	(4 to 20) mA isolated head-mounted transmitter
T72-00	(4 to 20) mA HART® isolated head-mounted transmitter
T82-00	(4 to 20) mA dual input, isolated HART® head-mounted transmitter

See transmitter ordering information in back of section.

5-0 Head Mounting Fittings

CODE	DESCRIPTION	CODE	DESCRIPTION
STEEL FITTINGS		316SS FITTINGS	
6HN	1/2" x 1/2" NPT hex nipple	8HN	1/2" x 1/2" NPT hex nipple
6PN	1/2" NPT pipe nipple (specify "E" length in inches)	8PN	1/2" NPT pipe nipple (specify "E" length in inches)
6XU ^[1]	1/2" NPT union/nipple (specify "E" length in inches)	8XU ^[1]	1/2" NPT union/nipple (specify "E" length in inches)

[1] 3 1/2" Minimum length required. Maximum "E" length is 9".

4-0 Element Options

FP ^[1]	Spring-loaded element with flame path
FE	Fixed element

[1] Only available with 8HN and 8XU head mounting fittings

HART® is a registered trademark of the HART Communication Foundation.

