
DEKRA 16ATEX0002 X; IECEx DEK 16.0011 X

Applied standards: ATEX: EN 60079-0 : 2012+ A11:2013

EN 60079-31:2014

IECEx: IEC 60079-0 : 2011+ Cor.2012+ Cor.2013

IEC 60079-31: 2013

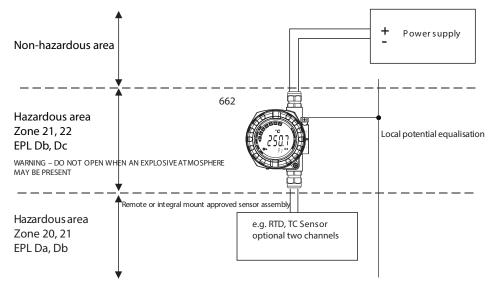

Safety instructions:

Installation

- Comply with the installation and safety instructions in the Operating Instructions.
- Install the device according to the manufacturer's instructions and any other valid standards and regulations (e.g. IEC 60079-14).
- Seal the cable entries tight with certified cable glands.
- The provided cable entries to option code glands are suitable ATEX/IECEx Ex certified cable glands with a temperature range of -20 °C to +95 °C.
- For operating the transmitter at an ambient temperature under -20 °C, appropriate cables, cable entries and sealing facilities permitted for this application must be used.
- The housing of the field transmitter must be connected to the potential matching line.
- For ambient temperatures higher than +70 °C, use suitable heat-resisting cables or wires, cable entries and sealing facilities for Ta +5K above surrounding.
- Use for integral temperature sensors only approved sensors certified for category 1D or 2D marked not less than II1/2D Ex ta/Ex tb IIIC T110 °C Da/Db or II2D Ex tb IIIC T110 °C Db for use in Zone 20 or Zone 21.
- Use for remote temperature sensors only approved sensors certified for category 2D marked not less than II2D Ex tb IIIC T110 °C Db for use in Zone 21.
- The maximum surface temperature specified for the certified temperature sensor shall be taken into account.



In an explosive atmosphere, do not open the device (ensure that the IP 66/67 housing protection is maintained during operation).

Type Electrical Data 662 HART* -protocol $U \le 40 \text{ V dc}$ $P \le 3 \text{ W}$

CategoryType of protection (ATEX)TypeII2DEx tb IIICT1110 °C Db662

Type of protection (IEC)Ex tb IIIC T110 °C Db

662

Type Max. surface temperature Ambient Temperature $+110 \,^{\circ}\text{C}$ $-40 \,^{\circ}\text{C} \leq \text{Ta} \leq +80 \,^{\circ}\text{C}$

TITLE:			PART NUMBER:	DATE:	
662 Safety Instructions	nstructions (D)			09/10	/2019
This document is PROPRIETARY to Pyromation, Inc.		SIZE:	DRAWING NO: M009502	REV:	SCALE: N/A

