


Explosion-Proof, Fixed-Element RTDs are made for use in U.S. and Canadian hazardous areas. They are designed to extinguish flames inside the device, eliminating the potential for ignition of flammable mixtures in the surrounding atmosphere. FM and CSA approved assemblies, dependent on connection head type, meet XP Class I Division I & II; Groups A, B, C, D; DIP Class II Division I; Groups E, F, G; Class III; Type 4/4X. They may be installed directly in the process without being inserted into a thermowell. The assemblies feature 316 stainless steel sheaths in various diameter sizes. They are available with or without process mountings and with aluminum or stainless steel explosion-proof connection heads.

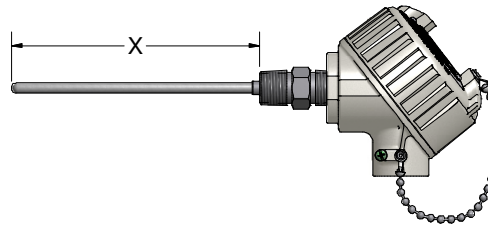

### ORDER CODES

**Example Order Number:**

1-0      2-0      2-1 2-2      3-0      4-0      5-0      5-1      5-2  
**XP - R1T185L 48 3 - 012 - 00 - 8HN 94, T-** Select Type and Range from back of Section

#### 1-0 Agency Approval

CODE	DESCRIPTION
XP	FM/CSA explosion-proof-approved assembly

#### 2-0 100 Ω Platinum RTD Elements α = 0.003 85 °C<sup>-1</sup>

CODE		TOLERANCE <sup>[1]</sup>	TEMP. RANGE
SINGLE	DUPLEX		
R1T185L	R1T285L	Grade B	(-200 to 200) °C
R5T185L	R5T285L	(1/5) Class B	(-30 to 150) °C
RBF185L	RBF285L	Class B	(-50 to 200) °C
RAF185L	RAF285L	Class A	(-30 to 200) °C
R1T185H	R1T285H	Grade B	(-200 to 600) °C
RAT185H	RAT285H	Class A	(-100 to 450) °C

[1] Refer to RTD tolerance information in the General Information section for calculations to determine specific tolerance at temperature.

#### 2-1 Sheath Diameters 316 SS

CODE	DIAMETERS (inches)
28 <sup>[1]</sup>	1/8
38	3/16
48	1/4
68	3/8

[1] Not available in duplex

#### 2-2 Element Connection

CODE	DESCRIPTION
2	2-wire element
3	3-wire element
4 <sup>[1]</sup>	4-wire element

[1] Not available in duplex or with 440 Series Transmitter

#### 5-1 Head Terminations

CODE	DESCRIPTION
74	DIN form B aluminum explosion-proof head, Group A
75T-642B	(4 to 20) mA HART® Field Transmitter with aluminum explosion-proof housing, Group A
76T82-D10	(4 to 20) mA dual input HART® Field Transmitter with digital display and explosion-proof aluminum housing, Group A
77T-662C	(4 to 20) mA HART® Field Transmitter with dual cavity explosion-proof aluminum housing, Group A
93	Aluminum explosion-proof head, Group A
94	316L stainless steel explosion-proof head, Group A

#### 5-2 Options

SB	1/2" NPT conduit reducer bushing
I	Stainless steel tag
T-440 <sup>[1]</sup>	(4 to 20) mA head-mounted transmitter
T-441	(4 to 20) mA isolated head-mounted transmitter
T-442	(4 to 20) mA HART® isolated head-mounted transmitter
T82-00	(4 to 20) mA dual input, isolated HART® head-mounted transmitter

See transmitter ordering information in back of section.

[1] Not available with option 74

#### 5-0 Head Mounting Fittings

CODE	DESCRIPTION
6HN	1/2" x 1/2" NPT steel hex nipple 1" "E" length
8HN	1/2" x 1/2" NPT stainless steel hex nipple 1" "E" length
9HP	1/2" NPT stainless steel bushing (no process threads)
8RNDC	3/4" x 1/2" NPT stainless steel hex nipple

#### 4-0 Sheath Mounting Fittings

CODE	DESCRIPTION
00	No Fitting

#### 3-0 "X" Dimensions

Insert three digit sheath length ("X" Dimension) in inches.

HART® is a registered trademark of the HART Communication Foundation.

