


Select desired leadwire type by order code number, followed by desired length in inches.

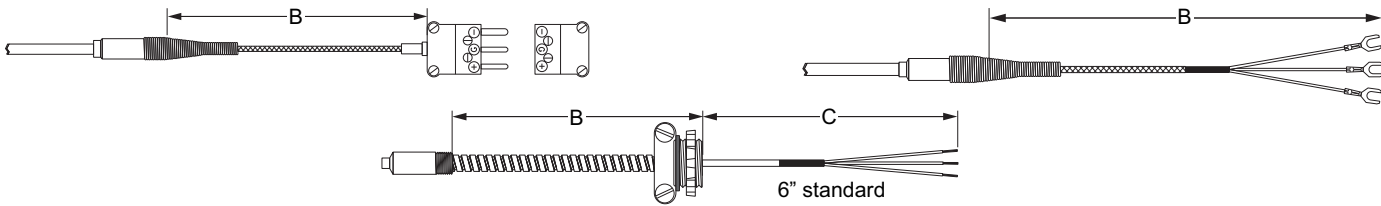

ORDER CODES

Example Order Number:

R5T185L483-006-01A,304-16

T3 036

**PAGE
RTD 5**

4 Extension Leadwire Type and B + C Dimension

CODE	DESCRIPTION	TEMP. RATING
FIBERGLASS		
F3J___	Fiberglass insulation - individual leads - stranded conductor (12" limit)	482 °C [900 °F]
F3___	Fiberglass insulation - stranded conductor	
F3A___	Fiberglass insulation - stranded conductor - flexible armor	
F3B___	Fiberglass insulation - stranded conductor - stainless steel overbraid	
TEFLON®		
T3J___	Teflon® insulation - individual leads - stranded conductor (12" limit)	204 °C [400 °F]
T3___	Teflon® insulation - stranded conductor	
T3A___	Teflon® insulation - stranded conductor - flexible armor	
T3B___	Teflon® insulation - stranded conductor - stainless steel overbraid	
M3___	Teflon® insulation - stranded conductor - stainless steel overbraid - Teflon® insulation	
T3M___	Teflon® insulation - stranded conductor - mylar shield	
T3MA___	Teflon® insulation - stranded conductor - mylar shield - flexible armor	
KAPTON®		
K3___	Kapton® insulation - stranded conductor	316 °C [600 °F]
K3A___	Kapton® insulation - stranded conductor - flexible armor	
K3B___	Kapton® insulation - stranded conductor - stainless steel overbraid	
SILICON RUBBER		
S3___	Teflon® insulation - stranded conductor - silicon rubber	204 °C [400 °F]
COIL CORDS		
C3060	PVC insulation - stranded conductor - coil cord - 60" extended length	104 °C [220 °F]
C3120	PVC insulation - stranded conductor - coil cord - 120" extended length	

Insert wire code number and 3 digit 'B' length in inches EX: T3036 = 36" B length

For assemblies requiring leadwire beyond the flexible armor (illustrated in 'C' in drawing), insert 3 digit 'C' length after armor length.
EX: F3A036 -012 = 36" B length with additional 12" 'C' length leads beyond armor.

All insulated leadwires in flexible armor are available with either extruded PVC or Teflon® covering over the flexible armor.
Substitute suffix codes T (Teflon®) or P (PVC) for the suffix 'A' code above. EXAMPLE: T3T is Teflon® covered armor.